TOTO®

WT172M

DUOFIT® In-Wall Tank Unit, 1.28GPF & 0.9GPF

FEATURES

- Dual flush system, low consumption (1.28GPF/4.8LPF & 0.9GPF/3.4LPF)
- Adjustable 15"-19" mounting height
- Support up to 880lbs
- Commercial 2" x 6" or optional residential installation with 2" x 4" wall studs with waste outlet kit
- 1-pc blow molded, insulated polyethylene tank to prevent leaks and sweating
- 2" x 6" Polyethylene outlet included
- Pre-plumbed for WASHLET®+ connection



MODELS

- WT172M - with copper washlet supply line

Required Push Plates (Sold Separately)

- YT920 #MS - Matte Silver
  #WH - White
  YT930 #MS - Matte Silver
  #WH - White
  YT970 #SS - Stainless Steel *(Available Q1 2019)*
  YT980 #SS - Stainless Steel *(Available Q1 2019)*

Compatible Outlets (Sold Separately)

- THU343 2" x 4" outlet HDPE & PVC
- THU335 2" x 6" outlet cast iron
- THU468 WASHLET connection kit

Compatible Toilet Bowl (Sold Separately)

- CT447CFG, RP™ Wall-hung toilet
- CT449CFG, SP™ Wall-hung toilet
- CT437FG, MH™ Wall-hung toilet

PRODUCT SPECIFICATION

This universal height, high-efficiency, dual flushing, in-wall tank system toilet shall be 1.28GPF & 0.9GPF. Requires TOTO toilet model CT447CFG, CT449CFG, or CT437FG. In-Wall tank system shall be TOTO Model WT172M_____.

CODES/STANDARDS

- Meets and exceeds
  - Carrier system: ASME A112.6.2
  - Tank trim: IAPMO PS50, CSA B125.3, ASSE1002
- Certifications: IAPMO(cUPC), *EPA Watersense, State of Massachusetts, City of Los Angeles, and others
- Code compliance: UPC, IPC, NSPC, NPC Canada, and others
- Complies with CA Prop 65 warning requirements

**WaterSense certification only applies to WT172M when combined with either model CT447CFG, CT449CFG, or CT437FG toilet bowls.*

WT172M

DUOFIT In-Wall Tank Unit, 1.28GPF & 0.9 GPF

SPECIFICATIONS

- Water Use 1.28GPF & 0.9GPF (4.8LPF & 3.4LPF)
- Flush System Dual-flush
- Min. Water Pressure 8 psi (static)
- Max. Water Pressure 108.75 psi (static)
- Installation Height 15" to 19" (projected range)
- Warranty One Year Limited Warranty
- Material Various
- Shipping Weight 45 lbs
- Shipping Dimensions 47-1/2" x 26" x 6"

INSTALLATION NOTES

Adequate structural bracing is required. Framing support should be capable of supporting 880 lbs load without damage to the wall. See installation manual for more details.

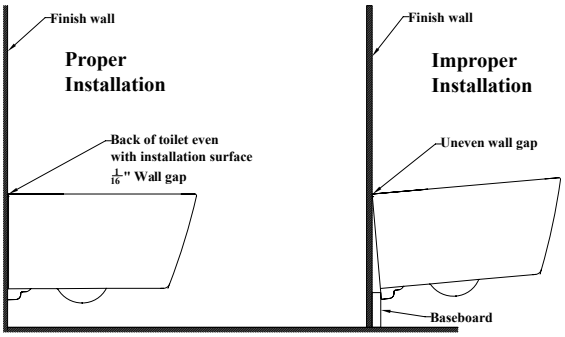

DIMENSIONS

